

Bright XGA Projection


X412



Exceptional brightness and lamp life



- Incredible 4,200 lumens and 50,000:1 contrast ratio
- Flexible installations with 1.1x zoom and RS232
- Accurate color with sRGB & REC.709 color profile
- Powerful 10 watt speaker
- Minimal maintenance with 15,000 hour lamp life

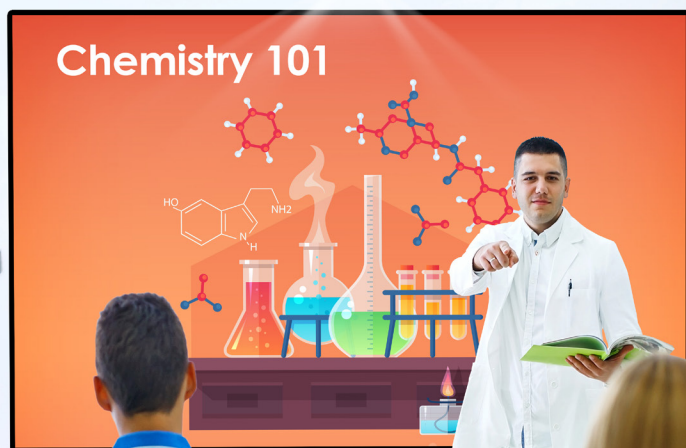

Project incredibly bright 4,200 lumens, XGA images with the Optoma X412. REC.709 and sRGB color profiles with a 50,000:1 contrast ratio ensures sharp and vivid images, ideal for classrooms, meeting and training rooms.

The 1.1x zoom, keystone correction and RS232 control deliver flexible installation options. Powerful 10-watt audio fills a room with loud and crisp audio to further enhance media and presentations.

Robust inputs include HDMI and VGA for connectivity to a wide range of devices. A 15,000-hour lamp life enables many years of use with minimal maintenance.

CONNECTIVITY (May require optional accessories)



Computers



Smart Phones



Tablets



3D Blu-ray/DVD Players



Camcorders



Apple TV®



Chromecast™

Bright XGA Projection - X412

OPTICAL/TECHNICAL SPECIFICATIONS


Display Technology	Texas Instruments 0.65" XGA DMD
Color Wheel	6 Segment; RYGCWB
Native Resolution	XGA (1024 x 768)
Maximum Resolution	UXGA (1600 x 1200)
Brightness	4,200 ANSI lumens
Contrast Ratio	50,000:1
Displayable Colors	1.07 billion
Lamp Life*	4,000/10,000/15,000 (Bright/Eco/Dynamic)
Light Source Type*	245W lamp
Projection Method	front, rear, ceiling mount, table top
Keystone Correction	±40 degree (vertical)
Geometry	Keystone correction
Lens Shift	N/A
Uniformity	85%
Offset	115% ±5%
Aspect Ratio	4:3 (native), 16:9, LBX and auto compatible
Throw Ratio	1.94-2.16:1
Projection Distance	3.3'-32.8' (without zoom)
Image Size	27.5"-304.4"
Projection Lens	F=2.41-2.53, F=21.86-24mm
Optical Zoom	1.1x
Digital Zoom	0.8 - 2.0x
Audio	10W
Noise Level	26 dB
Remote Control	Full size remote
360° and Portrait Mode Operation	No
Operating Temperature	41-104°F (5-40°C), 85% max humidity
Power Supply	AC input 100 - 240V, 50 - 60 Hz, auto-switching
Power Consumption	325W max, 295W typical (Bright mode), 225W max, 205W typical (Eco Mode)
High Altitude	Operating temperature at sea level up to 10,000 feet = 104° F (max); Must manually switch to high altitude mode from 5,000 feet and above (using OSD menu) to maintain optimal functionality

COMPATIBILITY SPECIFICATIONS


Computer Compatibility	VGA, SVGA, HDTV(720P), XGA, XGA+, SXGA, SXGA+, UXGA, HDTV(1080p), WUXGA
Video Input Compatibility	PAL, SECAM, 576i/p, NTSC, 480i/p, HDTV 720p/1080i/1080p
3D Compatibility†	Supports all HDMI 1.4a mandatory 3D formats (Frame pack, side-by-side, top-bottom) and up converts frame rate from 60Hz to 120Hz or 24Hz to 144Hz (i.e. 60 or 72 frames per eye). 3D glasses are needed and are sold separately. Refer to user manual for details.
Vertical Scan Rate	50- 85 Hz (120Hz for 3D feature projector)
Horizontal Scan Rate	15.375-91.146 KHz
Input lag	32ms
I/O Connection Ports	2x HDMI 1.4a, 1x VGA, 1x audio in, 1x USB-A, 1x VGA out, 1x audio out
Control	RS232

PHYSICAL SPECIFICATIONS

Security	Kensington® lock port, password (OSD)
Weight	7.7 lbs
Dimensions (W x H x D)	12.4(W) x 9.5 (D) x 4.5(H)

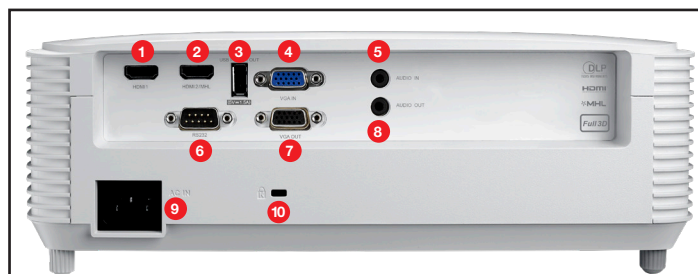

- 1. HDMI
- 2. HDMI
- 3. USB-Power/out
- 4. Audio-Out
- 5. VGA-In
- 6. VGA-Out
- 7. Audio-In
- 8. RS232
- 9. AC power
- 10. Kensington lock

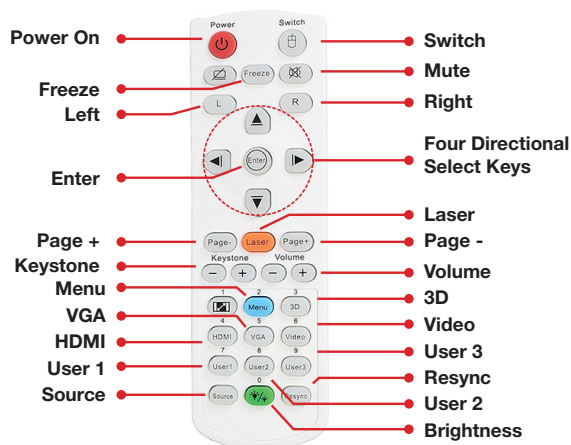

Warranty

1 Year limited parts and labor warranty on the projector, 90 days lamp warranty

What's in the Box

X412 projector, AC power cord, remote control, batteries for remote, quick start user manual

Accessories

Lamp (replacement): BL-FU245A
 Remote (replacement): BR-5080C
 Carrying case: BK-4028
 Universal ceiling mount: OCM815W
 Universal ceiling mount: OCM818W-RU
 Universal ceiling mount: BM-5001
 4K UHD Casting and mirroring adapter: UHDCast Pro
 QuickCast Pro 4K HDMI starter kit: QCP-SK-4K-HDMI (1 TX and 1 RX)
 QuickCast Pro 4K HDMI starter kit: QCP-4K-KIT (2 TX, 1 RX, 1 Cradle)

UPC 796435 44 393 1



Optoma.com

Light source life is dependent on brightness mode, display mode, usage, environmental conditions and more. Light source brightness can decrease over time.

Watching 3D projection while wearing 3D glasses for an extended period of time may cause headaches or fatigue. If you experience a headache, fatigue or dizziness, stop viewing the 3D projection and rest.

Copyright © 2019 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. 05272020