
## **MARBUL PLUS**

LFTL1124 L





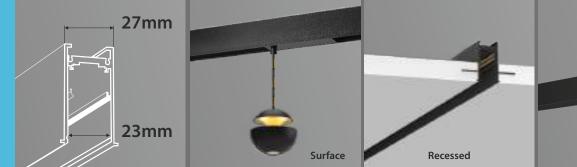

Wattage (W)   8W						
No. of LEDs		Wattage (W	()	8W		_
No. of LEDs	MEN	N 4000	K	800		_
Diameter   Ø   100   100     Height   H   97   97     Adapter   L   185   185     Hanging wire   L   1.5m   1.5m     Recessed (Trimless)     Track Size   L   500 / 1000 / 2000     W   67   H   54     Cutout   Ø   30     Surface mounted / Pendant / Recessed     Track Size   L   500 / 1000 / 2000     W   27 (23mm Inner wide   27 (23mm   1000   2000     Track Size   L   500 / 1000 / 2000     W   27 (23mm   1000   2000   2000     W   27 (23mm   1000   2000   2000     W   27 (23mm   1000   2000   2000   2000     W   27 (23mm   1000   2000	TUO	W 3000	K	760		
Diameter   Ø   100   100     Height   H   97   97     Adapter   L   185   185     Hanging wire   L   1.5m   1.5m     Recessed (Trimless)     Track Size   L   500 / 1000 / 2000     W   67   H   54     Cutout   Ø   30     Surface mounted / Pendant / Recessed     Track Size   L   500 / 1000 / 2000     W   27 (23mm Inner wide   27 (23mm   1000   2000     Track Size   L   500 / 1000 / 2000     W   27 (23mm   1000   2000   2000     W   27 (23mm   1000   2000   2000     W   27 (23mm   1000   2000   2000   2000     W   27 (23mm   1000   2000	NCY NCY	No. of LEDs		-		_
Diameter	YST	<b>Driver Ratir</b>	ıg	48V DC		
Adapter	SFF	UGR Rating		>9	>9	
Adapter	SNC mm	Diameter	Ø	100	100	
Adapter	NSI (in r	Height	Н	97	97	
Hanging wire     1.5m   1.5m	ME	Adapter	L	185	185	
Track Size	Δ	Hanging wire	Ł.	1.5m	1.5m	
W   67   H   54		Recessed (Tr	mles	ss)		
H   54		Track Size	L	500	/1000 / 2	000
Cutout   Ø   30     Surface mounted / Pendant / Recessed       Track Size   L			W	67		
Surface mounted / Pendant / Recessed			Н	54		
Track Size L 500 /1000 / 2000 W 27 (23mm Inner wid		Cutout	Ø	30		
W 27 (23mm Inner wid		Surface mour	nted	/ Pendant /	Recessed	
, ,		Track Size	L	500	/1000 / 2	000
1			W	27 (	23mm In	ner width)
H  54			Н	54		

SYSTEM	Housin LED Ma Driver Dimmi	ake Brand	Cree	nwell		ernal)
BEAM ANGLES		8W 	_			
COLOUR	Black -	+ Champ	agne G	iold	hamp	oagne Gold
_	RI 80	TEMP 0-45		IP RATIN		INPUT

