


MARBUL

LFTL931 A/B/C/D/E/K

MAGNETIC TRACK LIGHTS

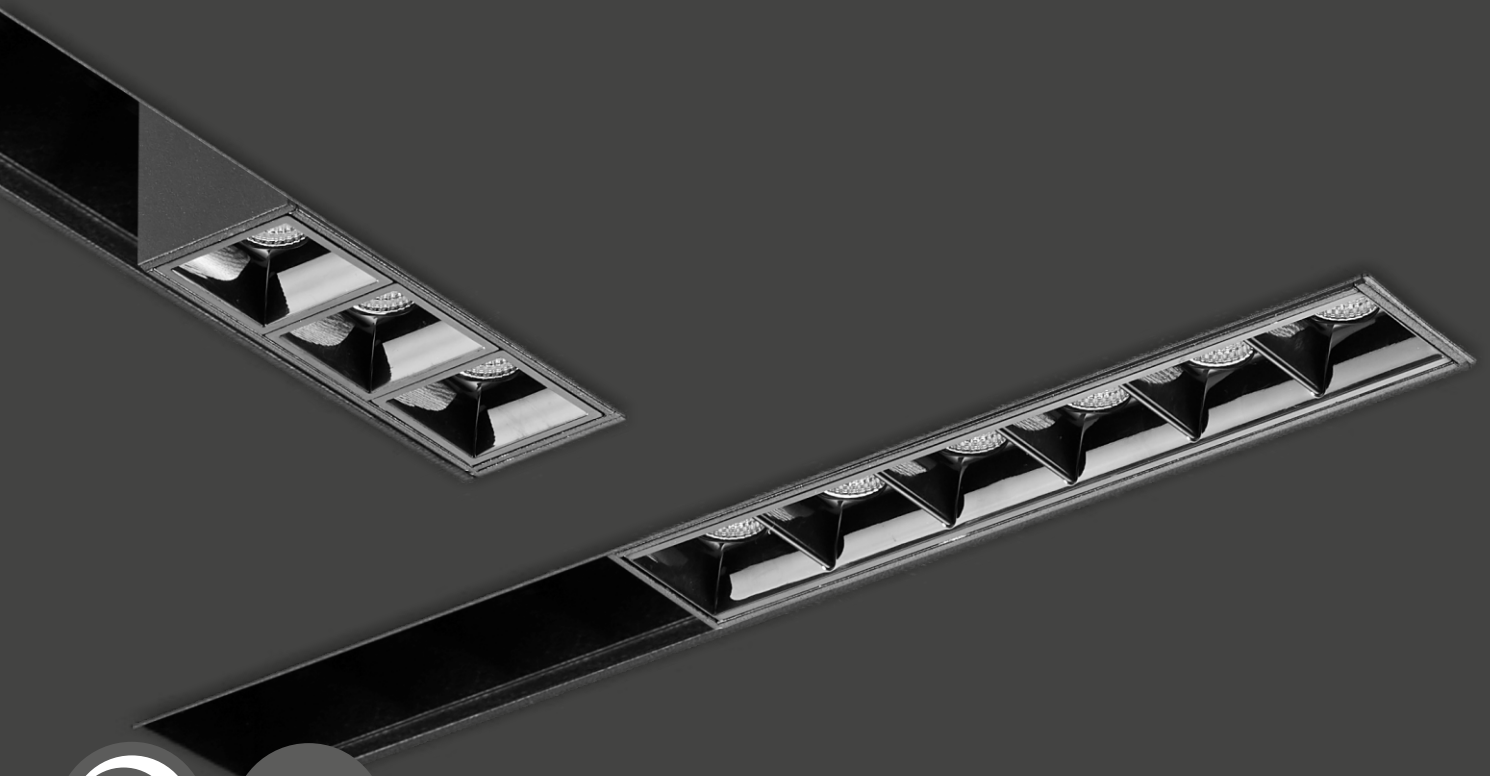

LFTL931D

LFTL931C

LFTL931E / V


Recessed
LFTL931 A/B/K

Surface / Suspended
LFTL931 A/B/K

Wattage (W)		2W	6W	12W	18W	
LUMEN OUTPUT	N 4000K	150	450	900	1350	
	W 3000K	140	420	840	1260	
SYSTEM EFFICIENCY	No. of LEDs	1	3	6	6	
	THD (%)	-	-	-	-	
	Driver Rating (For 1 Spot)	24V DC	24V DC	24V DC	24V DC	
		90mA	250mA	500mA	750mA	
DIMENSIONS (in mm)	Size	L	34	94	165	323
		W	34	34	34	34
	Height	H	56	56	56	56
Track Size	L	500 / 1000 / 2000				
	W	40				

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Meanwell (External)

BEAM ANGLES	2W, 6W, 12W, 18W
	23°

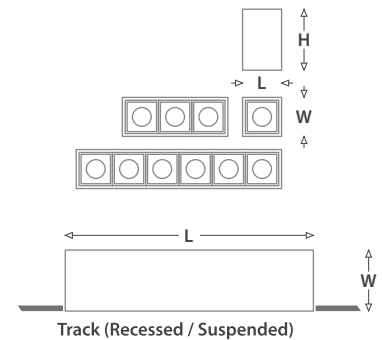

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC