


MARBUL

LFTL931 A/B/K/F/S/G


MAGNETIC TRACK LIGHTS




24 V DC



LFTL931 F/S/G





Recessed
LFTL931 A/B/K



Surface / Suspended
LFTL931 A/B/K

		Wattage (W)	10W	20W	30W
LUMEN OUTPUT	N 4000K		750	1500	2250
	W 3000K		700	1400	2100
SYSTEM EFFICIENCY	No. of LEDs		24	48	72
	THD (%)		-	-	-
	Driver Rating (For 1 Spot)		24V DC 420mA	24V DC 850mA	24V DC 1250mA
DIMENSIONS (in mm)	Size	L	320	640	960
		W	34	34	34
	Height	H	56	56	56
	Track Size	L	500 / 1000 / 2000		
		W	40		

SYSTEM SPECS	Housing	Aluminum
LED Make	Bridgelux	Bridgelux
Driver Brand	Meanwell (External)	Meanwell (External)

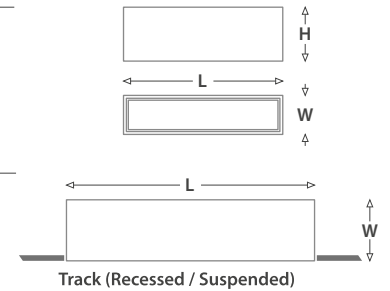

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC