
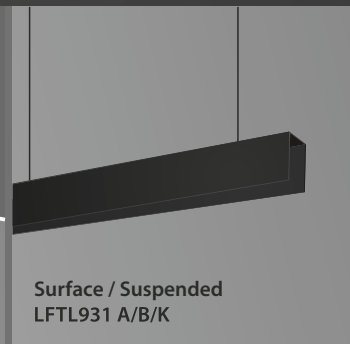


MARBUL

LFTL931 A/B/K/U

MAGNETIC TRACK LIGHTS



	Wattage (W)	6W
LUMEN OUTPUT	N 4000K	450
	W 3000K	420
SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Driver Rating (For 1 Spot)	24V DC 250mA
DIMENSIONS (in mm)	Diameter Ø	34
	Height H	54
Track Size	L	500 / 1000 / 2000
	W	40

SYSTEM SPECS	Housing	Aluminum	
	LED Make	Cree	
	Driver Brand	Meanwell (External)	
BEAM ANGLES	6W		
	25°		
		Track (Recessed / Suspended)	
CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

MARBUL

LFTL931 A/B/K/X

MAGNETIC TRACK LIGHTS



24 V DC



LFTL931 X






Recessed
LFTL931 A/B/K



Surface / Suspended
LFTL931 A/B/K

Wattage (W)		15W
LUMEN OUTPUT	N 4000K	1386
	W 3000K	1300
SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Driver Rating (For 1 Spot)	24V DC 625mA
DIMENSIONS (in mm)	Diameter Ø	70
	Height H	112
Track Size	L	500 / 1000 / 2000
	W	40

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

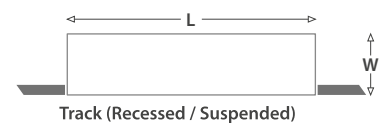

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC