


LIGHTBAR

LFSL1080A,B

OFFICE LIGHT

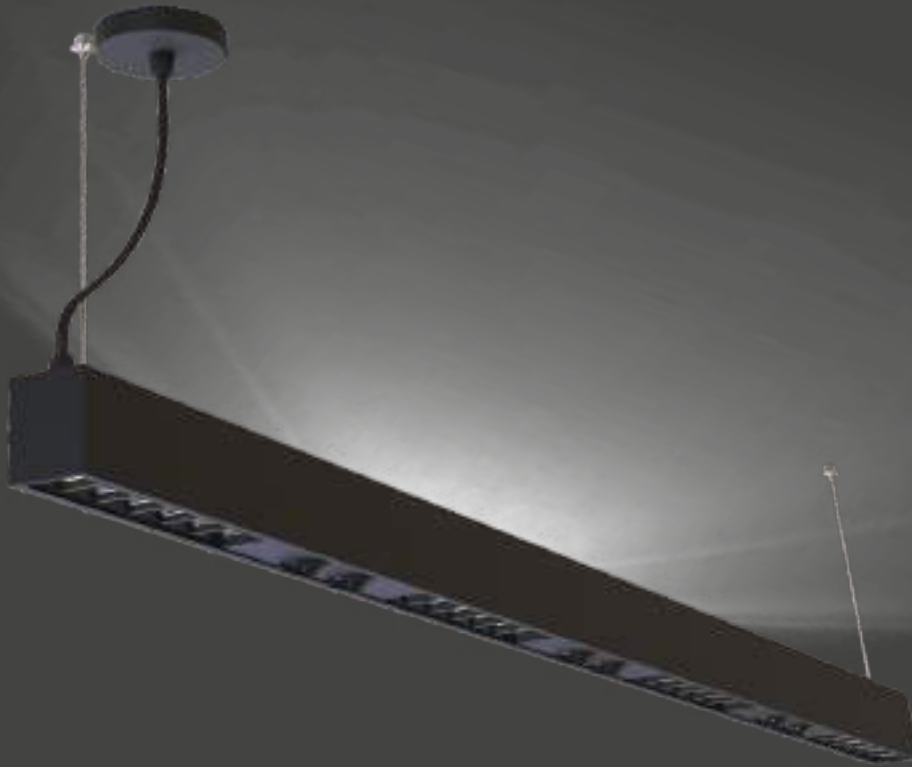


Wattage (W)		TOTAL - 56W UP - 12W DOWN - 20W(SMD) 24W(COB)
LUMEN OUTPUT	N 4000K	TOTAL - 4648lm UP - 960lm (SMD) DOWN - 1752lm (SMD) 1936lm (COB)
SYSTEM EFFICIENCY	No. of LEDs	-
	THD (%)	20
	Power Factor	>0.9
	Driver Rating	30-45V DC 800mA (UP & DOWN SMD) 30-40V DC 450mA (DOWN COB)
DIMENSIONS (in mm)	Length L	1120
	Width W	40
	Height H	85

SYSTEM SPECS	Housing	Aluminum
	LED Make	UP (SMD) - Bridgelux DOWN (SMD) - Osram DOWN (COB) - Bridgelux
	Driver Brand	LAFIT

BEAM ANGLES	UP	DOWN
	34°	100°

COLOUR OPTIONS	White	Black
----------------	-------	-------

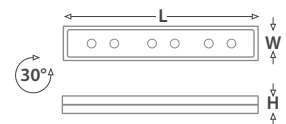

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz