


CP-DNW-HPU4H2-48-V2

6 Ports Switch with 4 PoE Ports & 2 Uplink Ports

- 4, 100Mbps; RJ45 ports, Supports Max. 30W Output of Single PoE Port
- Support IEEE802.3/802.3u/802.3x
- 2, 100Mbps, Transmission Distance: 0-100m
- Easy and safe installation

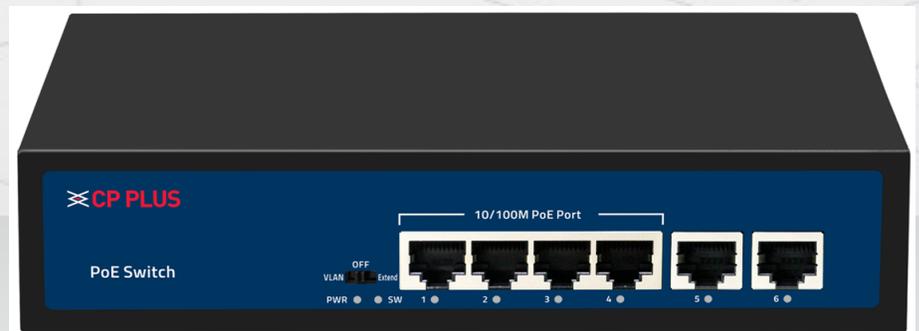

System Overview

As most of the CP PLUS products have been integrated with the Power of Ethernet technology which makes troubleshooting easier in case any errors occur. This can be done with the help of a PoE Switch makes increases reliability rapidly.

Functions

Better Connectivity

This PoE Switch has designed for outstanding power with flexible placement for better and advanced connectivity between network devices



CP-DNW-HPU4H2-48-V2

6 Ports Switch with 4 PoE Ports & 2 Uplink Ports

Functions

Switching Performance

This PoE Switch offers the forwarding capacity to simultaneously process traffic on all ports at line rate without any packet loss.

Easy to Use

This PoE Switch is quite easy to install and use. It requires no configuration and installation. With outstanding performance

LED Indicator

LED lights have been installed in this Ethernet Switch to work as indicators for you to realize simple work statement reminders and clear the troubles.

Supports Full Duplex Mode

The duplex mode makes this Ethernet Switch capable of sending and receiving information at the same time, enabling bi-directional network data transmissions to save time and money.

About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedented levels even when compared to international competitors.



CP-DNW-HPU4H2-48-V2

6 Ports Switch with 4 PoE Ports & 2 Uplink Ports

Feature	Specification
Uplink Ports	2, 10/100Mbps; Transmission Distance: Default: 0-100m
PoE Ports	4, 10/100Mbps; RJ45 port; Max. 30W Output of Single PoE Port
Switch Capacity	1.2Gbps (non-blocking)
Packet Forwarding Rate	0.1488 Mbps/port
Network Standard	IEEE802.3/802.3u/802.3x
Network Ports	6
MAC Address List	2k
Transmission Distance	0-100m/100Mbps or Max. 250m/10Mbps via Cat.5e or more under Extend mode
PoE Standard	IEEE802.3af, IEEE802.3at
VLAN	Support
PoE Watchdog	Support
Mode DIP	Green light off: Normal/Default mode Green light on: VLAN mode Green light flash: Extend mode
PWR (Power supply Indicator)	Light on: Powering Light off: No Power
RJ-45 ACT Indicator	Green light off: Link is disconnected Green light on: Link is connected Green light flash: Data Transmitting
Surge Protection	Common mode/RJ45 port: 4KV Differential mode/RJ45 port: 2KV Common mode/Power board: 2KV Differential mode/Power board: 1KV
Forwarding Mode	Store-and-forward
ESD Protection	Air discharge: 8KV Contact discharge: 6KV

Feature	Specification
PoE Power Supply	1/2(+), 3/6(-)
Power Source	Built-in Power Supply, Input: 100-240V AC, 50/60Hz
PoE Power Budget	48W
Power Consumption	<5W
Humidity	5%-95% , non-condensing
Operating Temperature	-10°C ~50°C
Storage Temperature	-40°C ~70°C
Color	Black
Dimensions	200mm x 118mm x 44mm (LxWxH)
Weight	0.6 Kg (without packaging)

Company Name:

CP PLUS (Aditya Infotech Ltd.)

F-28 Okhla Industrial Area, Phase 1,

New Delhi 110020, INDIA

Contact Mail ID :- customercare@cpplusworld.com