

DS-K1T331W Face Recognition Terminal



- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face Recognition Access Control Terminal, 3.97-inch LCD touch screen, 2 Mega pixel wide-angle lens
- Max.1000 faces capacity
- Configuration via the web client
- Supports TCP/IP, Wi-Fi communication
- Supports ISUP5.0, ISAPI


▪ Specification

| System Parameters | |
|-------------------------------|--|
| Operation System | Linux |
| Camera | 2 MP dual-lens camera with wide dynamic range |
| Capacity | Card: 1500 (When connecting external card reader) Face: 1000 Event: 150,000 |
| 1:N face recognition duration | < 0.2 s |
| general | |
| FOV | HFOV = 41°; VFOV = 75° |
| LCD Screen | |
| LCD Screen | 3.97-inch touch screen |
| General | |
| Face Recognition Distance | 0.3 m to 1.5 m |
| Interface | USB × 1, electric lock × 1, door contact × 1, tamper × 1, exit button × 1, RS-485 × 1 |
| Communication Mode | TCP/IP: 10/100 Mbps, self-adaptive |
| Power supply | 12 V, 1.5 A, 18 W |
| Working temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| Working humidity | 10 to 90% (no condensing) |
| Dimension | 120 mm × 110 mm × 23 mm (4.7" × 4.3" × 0.9") |
| Application situation | Indoor use |
| Language | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil) |
| Platform | Hik-ProConnect and HikCentral Professional |
| Communication protocol | HikCentral Pro OpenAPI and Hik-ProConnect OpenAPI |

▪ Available Model

DS-K1T331W

▪ Dimension

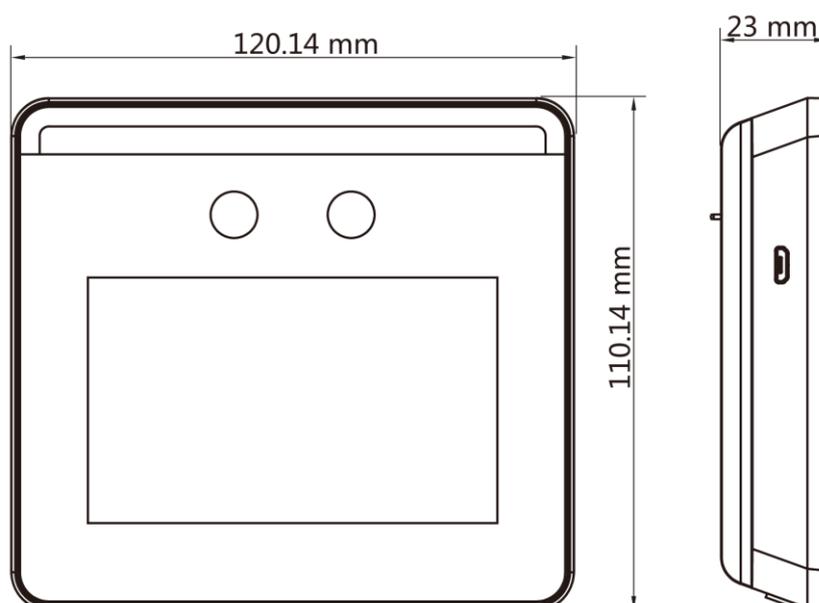

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

