


SKYLINE - 0709

LFPF0709D





SURFACE PROFILE LIGHTS

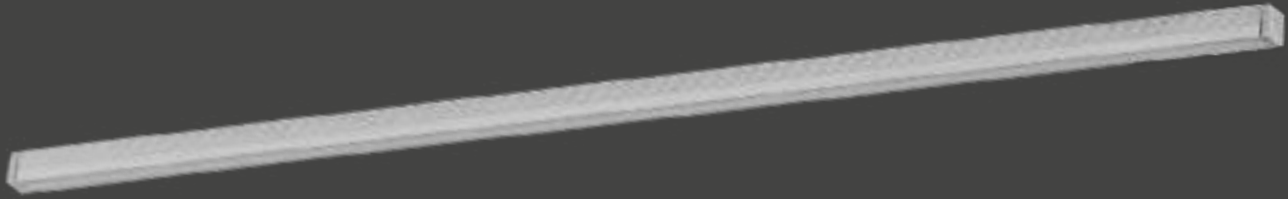

LFPF1109D

SKYLINE - 1109

RECESSED PROFILE LIGHTS

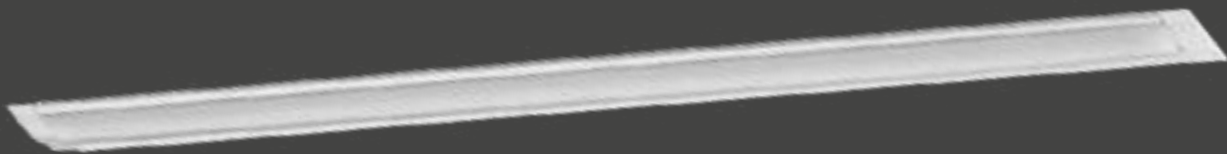

LFPF0709D



LFPF1109D

SKYLINE - 0709 (LFPF0709D)

Wattage (W)		4W (per ft)
LUMEN OUTPUT	C 6500K	396 (per ft)
	N 4000K	388 (per ft)
	W 3000K	380 (per ft)
SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC


DIMENSIONS (in mm)	Size	L	Customise
		W	07
	Height	H	09
	Cutout	L	Customise
		W	07

SKYLINE - 1109 (LFPF1109D)

Wattage (W)		4W (per ft)
LUMEN OUTPUT	C 6500K	396 (per ft)
	N 4000K	388 (per ft)
	W 3000K	380 (per ft)
SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Customise
		W	11
	Height	H	09
	Cutout	L	Customise
		W	7.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	Meanwell (External)



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC