


SKYLINE - 1408

LFPF1408D





SURFACE PROFILE LIGHTS

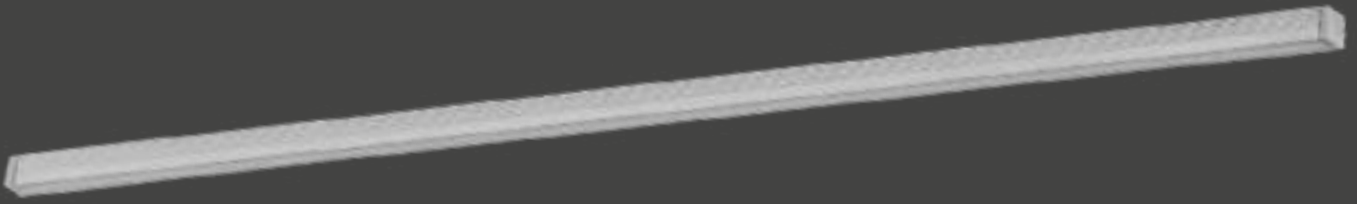


LFPF1808D

SKYLINE - 1808

RECESSED PROFILE LIGHTS

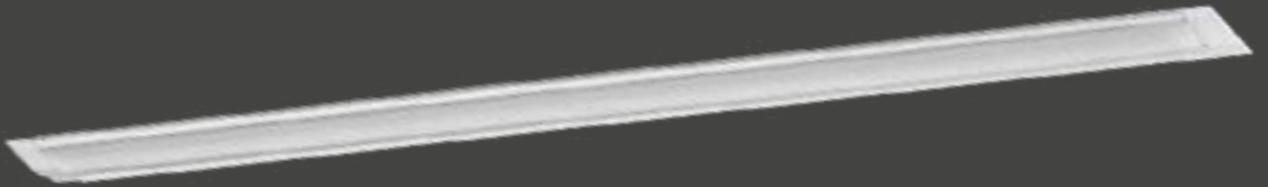

LFPF1808D

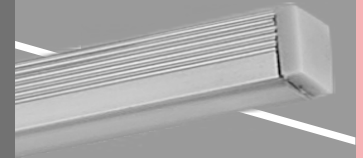

LFPF1408D

SKYLINE - 1408 (LFPF1408)

Wattage (W)		4.5W (per ft)	7W (per ft) Tunable
LUMEN OUTPUT	C 6500K	427 (per ft)	665 (per ft)
	N 4000K	424 (per ft)	658 (per ft)
	W 3000K	420 (per ft)	651 (per ft)

SYSTEM EFFICIENCY		SMD	SMD
No. of LEDs			
THD (%)		-	-
Driver Rating		24VDC	24VDC

DIMENSIONS (in mm)		Customise	Customise
Size	L		
	W	14.2	14.2
Height	H	8.5	8.5

SKYLINE - 1808 (LFPF1808)

Wattage (W)		4.5W (per ft)	7W (per ft) Tunable
LUMEN OUTPUT	C 6500K	427 (per ft)	665 (per ft)
	N 4000K	424 (per ft)	658 (per ft)
	W 3000K	420 (per ft)	651 (per ft)

SYSTEM EFFICIENCY		SMD	SMD
No. of LEDs			
THD (%)		-	-
Driver Rating		24VDC	24VDC

DIMENSIONS (in mm)		Customise	Customise
Size	L		
	W	18.5	18.5
Height	H	8.5	8.5
Cutout	L	Customise	Customise
	W	14.5	14.5

SYSTEM SPECS		Aluminium
Housing		
LED Make		Bridgelux
Driver Brand		Meanwell (External)



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC