


SKYLINE - 1515

LFPF1515D




SURFACE PROFILE LIGHTS

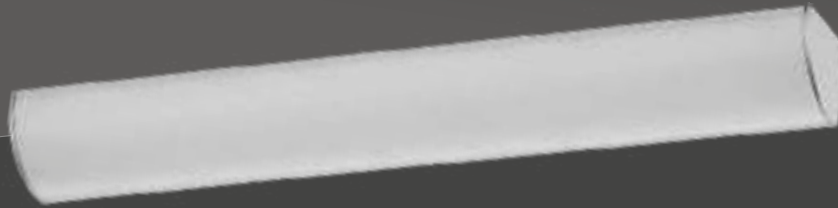

LFPF1804D

SKYLINE - 1804


SURFACE PROFILE LIGHTS

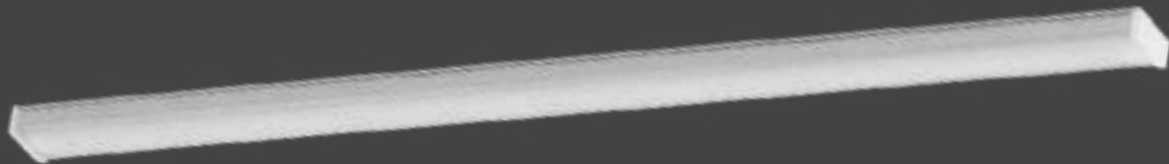

BENDABLE



LFPF1804D

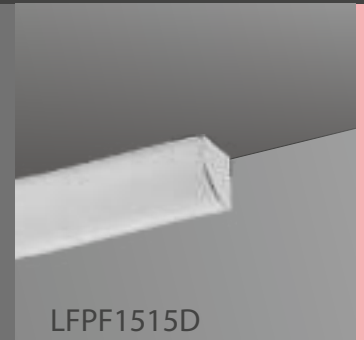

LFPF1515D

SKYLINE - 1515 (LFPF1515D)

Wattage (W)		4.5W (per ft)	7W (per ft) Tunable
LUMEN OUTPUT	C 6500K	427 (per ft)	665 (per ft)
	N 4000K	424 (per ft)	658 (per ft)
	W 3000K	420 (per ft)	651 (per ft)

SYSTEM EFFICIENCY		SMD	SMD
No. of LEDs			
THD (%)		-	-
Driver Rating		24VDC	24VDC

DIMENSIONS (in mm)		Customise	Customise
Size	L	15.5	15.5
	W		
Height	H	15.5	15.5

SKYLINE - 1804 (LFPF1804D)



Wattage (W)		4.5W (per ft)	7W (per ft) Tunable
LUMEN OUTPUT	C 6500K	427 (per ft)	665 (per ft)
	N 4000K	424 (per ft)	658 (per ft)
	W 3000K	420 (per ft)	651 (per ft)

SYSTEM EFFICIENCY		SMD	SMD
No. of LEDs			
THD (%)		-	-
Driver Rating		24VDC	24VDC

DIMENSIONS (in mm)		Customise	Customise
Size	L	18	18
	W		
Height	H	4.4	4.4

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)

BEAM ANGLES	4.5W,7W
	120°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC