


SKYLINE - 1707

LFPF1707D




SURFACE PROFILE LIGHTS

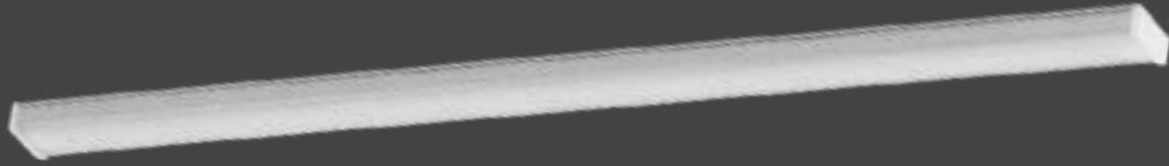

LFPF2407D

SKYLINE - 2407

RECESSED PROFILE LIGHTS

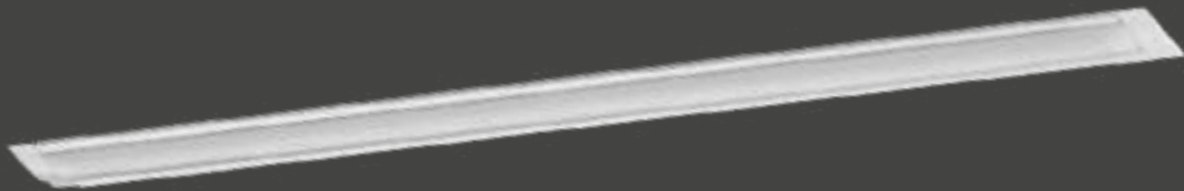

LFPF1707D



LFPF2407D

SKYLINE - 1707 (LFPF1707D)

Wattage (W)		4.5W (per ft)	7W (per ft) Tunable
LUMEN OUTPUT	C 6500K	427 (per ft)	665 (per ft)
	N 4000K	424 (per ft)	658 (per ft)
	W 3000K	420 (per ft)	651 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD
	THD (%)	-	-
	Driver Rating	24VDC	24VDC

DIMENSIONS (in mm)	Size	L	Customise	Customise
	Height	H	7.3	7.3


SKYLINE - 2407 (LFPF2407D)

Wattage (W)		4.5W (per ft)	7W (per ft) Tunable
LUMEN OUTPUT	C 6500K	427 (per ft)	665 (per ft)
	N 4000K	424 (per ft)	658 (per ft)
	W 3000K	420 (per ft)	651 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD
	THD (%)	-	-
	Driver Rating	24VDC	24VDC

DIMENSIONS (in mm)	Size	L	Customise	Customise
	Height	H	7.3	7.3
Cutout	L	Customise	Customise	
	W	18	18	

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
Driver Brand	Meanwell (External)	



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC