



ANGEL PLUS

LFSL1122B


LINEAR SPOT LIGHT TRIMLESS

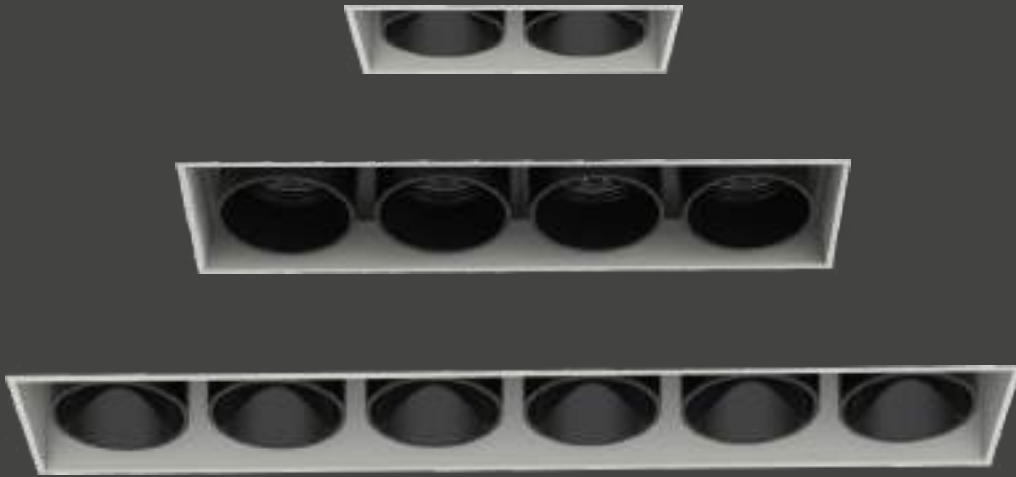

Accessories



Honeycomb

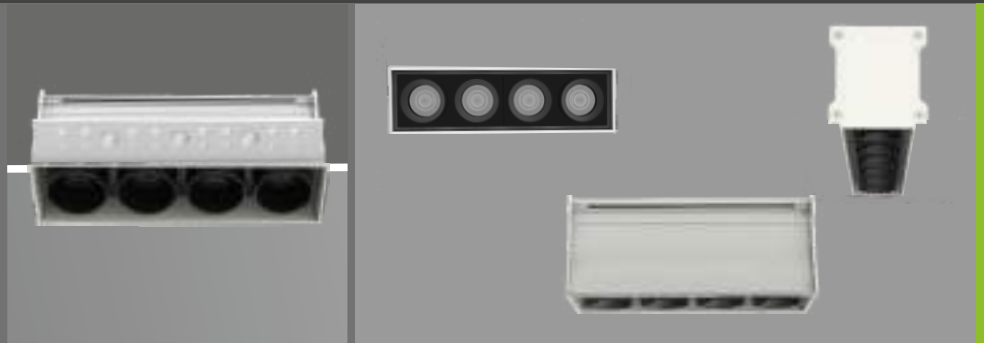

Wattage (W)		5W	10W	15W	
LUMEN OUTPUT	N 4000K	460	920	1380	
	W 3000K	450	900	1350	
SYSTEM EFFICIENCY	No. of LEDs	2	4	6	
	THD (%)	-	60	60	
	Power Factor	0.5	0.85	0.85	
	Driver Rating	2.8-9V 700mA	7-12V 700mA	12-21V 700mA	
	URG Rating	<16	<16	<16	
	Surge	1.5kV	2.5kV	3kV	
DIMENSIONS (in mm)	Size	L	68	128	187
		W	81	81	81
	Height	H	53	53	53
	Cutout	L	70	130	190
	W	50	50	50	

SYSTEM SPECS	Housing	Aluminum
LED Make	Osram	
Driver Brand	Alloooking (5W), Fulham (10W,15W)	
Dimming	Triac / Analog(10W,15W) / Dali	

BEAM ANGLES	5W, 10W, 15W
	15°, 24°, 38°

COLOUR OPTIONS	Housing	White
Reflector	Black	

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

