
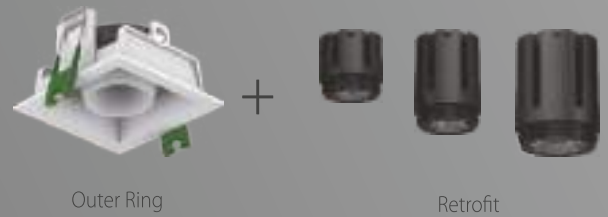
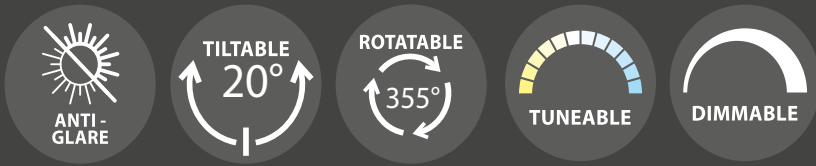


PLATINUM - K

LFSL1101A,B,C,D,E

RECESSED MODULAR SPOTLIGHT

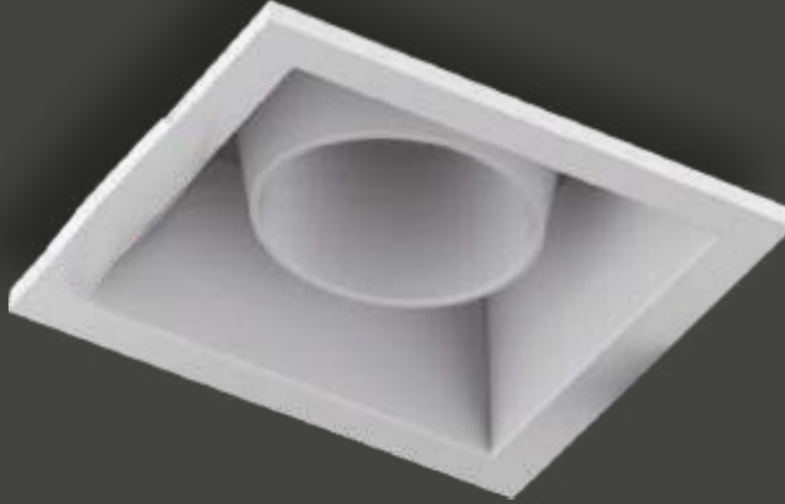

Wattage (W)		7W	9W	12W	15W	18W	24W	33W	
LUMEN OUTPUT	N 4000K	720	900	1262	1485	1634	2639	3128	
	W 3000K	672	840	1262	1485	1634	2500	2924	
	W 2700K	672	840	1173	1380	1518	2399	2720	
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1	1	1	1	
	THD (%)	-	20	20	20	20	15	15	
	Power Factor	>0.45	>0.9	>0.9	>0.9	>0.9	>0.95	>0.95	
	Driver Rating	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA	36V DC 400mA	36V DC 600mA	36V DC 700mA	
DIMENSIONS (in mm)	Size	L	90	90	90	90	110	110	130
		W	90	90	90	90	110	110	130
	Height	H	79	79	102	102	116	116	139
		Cutout	L	80	80	80	80	95	95
	W		80	80	80	80	95	95	115

SYSTEM SPECS	Housing	Aluminium	
	LED Make	Cree	
	Driver Brand	Fulham	
	Dimming	Triac / Analog / Dali	
BEAM ANGLES	7W, 9W, 12W, 15W, 18W, 24W, 33W, 40W		
COLOUR OPTIONS	Housing	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	
CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz

