


# ASTRUM

LFDL907A

## RECESSED ADJUSTABLE SPOTLIGHT

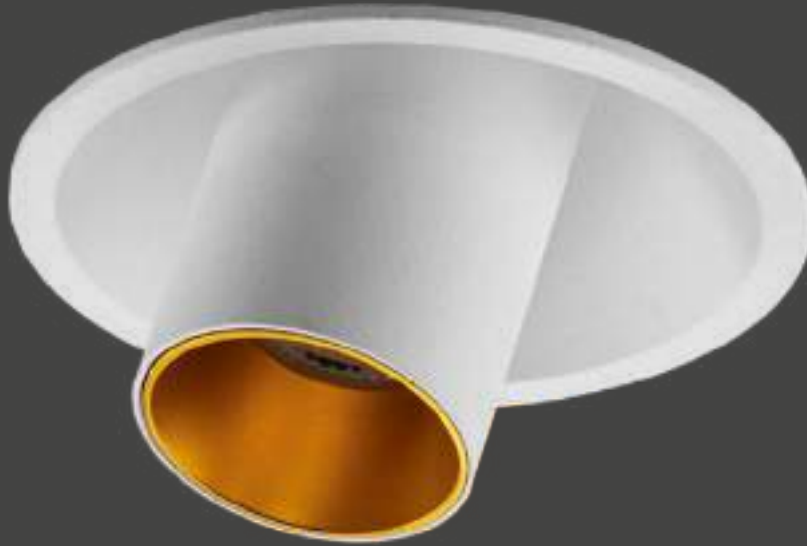

Wattage (W)		7W	12W
LUMEN OUTPUT	<b>C</b> 6500K	650	1130
	<b>N</b> 4000K	615	1100
	<b>W</b> 3000K	560	1060
SYSTEM EFFICIENCY	No. of LEDs	1	1
	THD (%)	55	55
	Power Factor	0.80	0.85
	Driver Rating	16-27V DC 300mA	28-40V DC 300mA
	Surge	2kV	2kV
DIMENSIONS (in mm)	Diameter X	90	90
	Height H	92	92
	Cutout Ø	83	83

SYSTEM SPECS	Housing	Aluminum	
	LED Make	Bridgelux	
	Driver Brand	Philips	
	Dimming	Triac / Analog	
BEAM ANGLES	7W, 12W		
		36°	
COLOUR OPTIONS	Housing	<input type="checkbox"/> White	
	Reflector	<input type="checkbox"/> Black <input type="checkbox"/> Copper	
CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

