
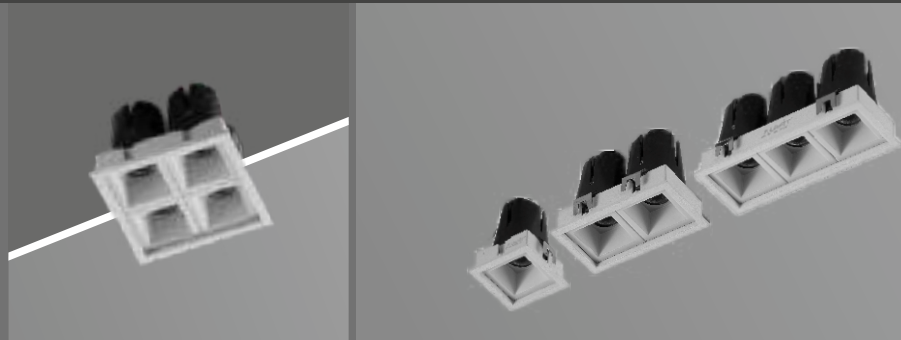


# DELON

LFSL1037A, B, C, D

## RECESSED FIXED DOWNLIGHT

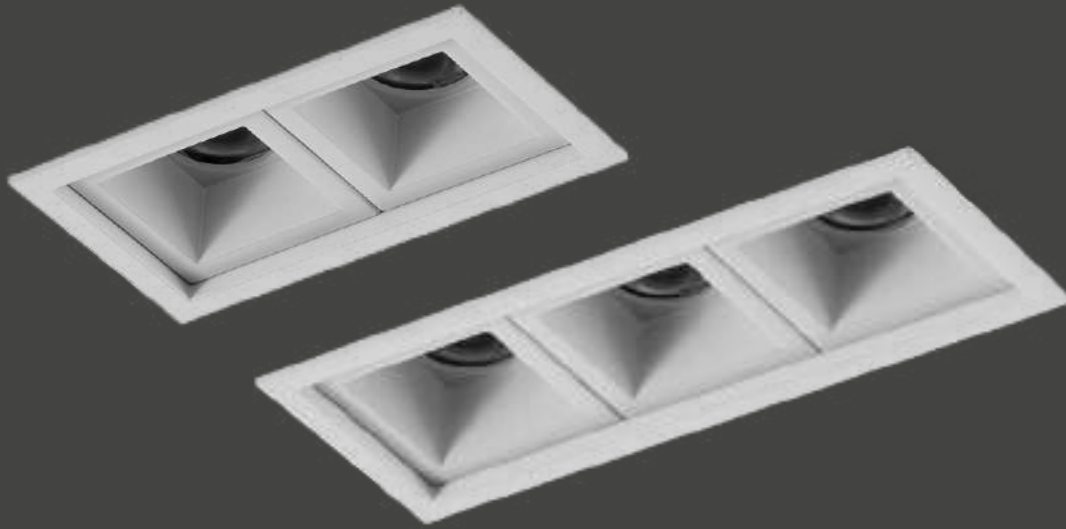

Wattage (W)		5W	10W	15W	20W	
LUMEN OUTPUT	N 4000K	595	1190	1785	2380	
	W 3000K	559	1115	1675	2235	
SYSTEM EFFICIENCY	No. of LEDs	1	2	3	4	
	THD (%)	-	-	-	≥10	
	Power Factor	0.5	0.9	0.9	0.95	
	Driver Rating	9V 500mA	18V 500mA	27V 500mA	36V 500mA	
DIMENSIONS (in mm)	Size	L	52	92	132	92
		W	52	52	52	92
	Height	H	69	69	69	69
	Cutout	L	48	88	128	88
	W	48	48	48	88	

SYSTEM SPECS	Housing	Aluminum PDC
	LED Make	Bridgelux
	Driver Brand	Fulham
	Dimming	Triac / Analog / Dali

BEAM ANGLES	5W, 10W, 15W, 20W
	30°

COLOUR OPTIONS	Housing	White
	Reflector	White Black Chrome Copper

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

