
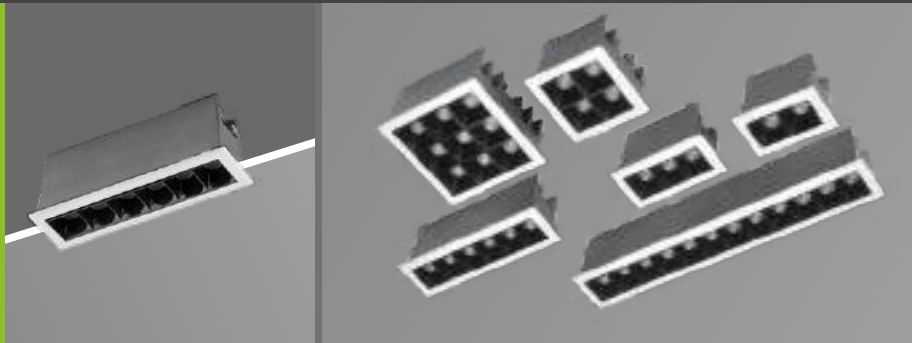


# MINI ANGLE

LFSL1050

## RECESSED LINEAR SPOTLIGHTS

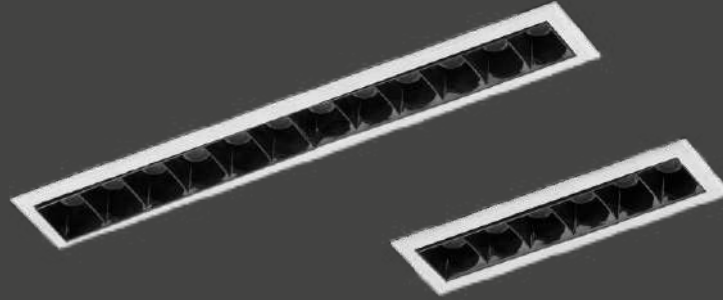

Wattage (W)		4W	6W	8W	12W	18W	24W
LUMEN OUTPUT	N 4000K	405	607	912	1368	1944	2592
	W 3000K	385	578	867	1300	1850	2467
SYSTEM EFFICIENCY	No. of LEDs	2	3	4	6	9	12
	THD (%)	-	-	-	60	10	10
	Power Factor	0.5	0.5	0.5	0.85	0.97	0.97
	Driver Rating	2-10V DC 500mA	2-10V DC 500mA	8-24V DC 600mA	21-21V DC 640mA	18-36V DC 610mA	18-36V DC 610mA
DIMENSIONS (in mm)	Diameter L	52	62	52	108	71	204
	W	32	32	52	32	71	32
	Height H	40	40	40	40	40	40
	Cutout L	47	57	47	104	66	200
W	28	28	47	28	66	28	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Allooking (2W, 6W, 8W), Fulham (12W, 18W, 24W)
	Dimming	Triac / Analog/ Dali

BEAM ANGLES	2W, 6W, 8W, 12W, 18W, 24W
	27°

COLOUR OPTIONS	Housing	White
	Inner Ring	Black

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

