



# BEACON

LFSL1042A

RECESSED FIXED DOWNLIGHT  
RECESSED FIXED TRIMLESS DOWNLIGHT

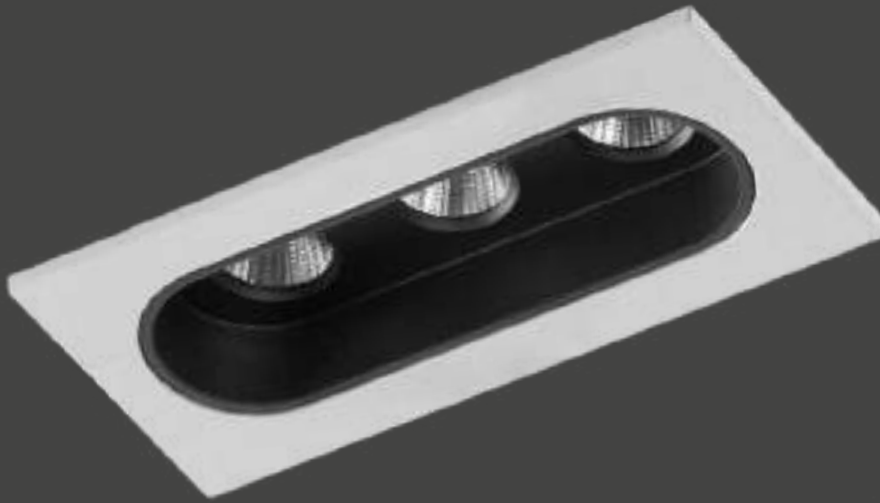

TRIMLESS



LFSL1042B



Recessed  
LFSL1042A



Surface  
LFSS1043A

<b>Wattage (W)</b>		11W	
<b>LUMEN OUTPUT</b>	<b>N</b> 4000K	1073	
	<b>W</b> 3000K	998	
<b>SYSTEM EFFICIENCY</b>	<b>No. of LEDs</b>	3	
	<b>THD (%)</b>	60	
	<b>Power Factor</b>	0.85	
	<b>Driver Rating</b>	21-42V DC 350mA	
	<b>Surge</b>	3kV	
<b>DIMENSIONS (in mm)</b>	<b>Size</b>	L	120 207
		W	55 77
	<b>Height</b>	H	57 66
		<b>Cutout</b>	L
	W	45 80	

<b>SYSTEM SPECS</b>	<b>Housing</b>	Aluminum + Gypsum		
	<b>LED Make</b>	Bridgelux		
	<b>Driver Brand</b>	Fulham		
	<b>Dimming</b>	Triac / Analog		
<b>BEAM ANGLES</b>	11W			
	24°			
<b>COLOR OPTIONS</b>	<b>Housing</b>	White		
	<b>Inner Ring</b>	Black		
<b>CRI</b>	<b>TEMP</b>	<b>IP RATING</b>	<b>INPUT</b>	
90	0-50°	IP-20	240V/ 50Hz	

