


LUMIX A


LFSL1045A

TRIMLESS ADJUSTABLE SPOTLIGHT

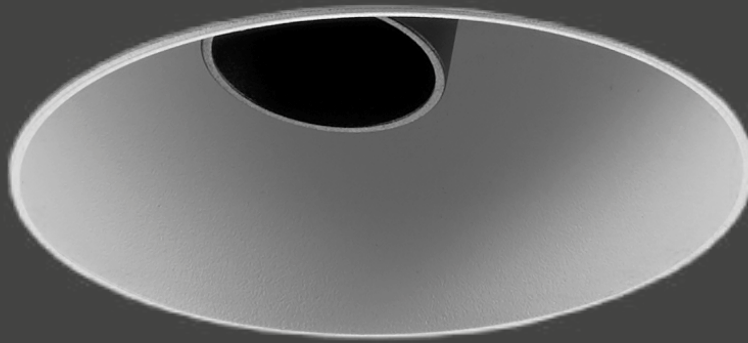

Wattage (W)		9W
LUMEN OUTPUT	N 4000K	690
	W 3000K	640
SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Power Factor	0.8
	Driver Rating	9-15V DC 700mA
	Surge	1.7KV
DIMENSIONS (in mm)	Diameter X	124
	Height H	111
	Cutout Ø	90

SYSTEM SPECS	Housing	Aluminum	
	LED Make	Bridgelux	
	Driver Brand	LAFIT	
	Dimming	Triac / Analog / Dali	
BEAM ANGLES	9W		
	18°		
COLOUR OPTIONS	Housing	<input type="checkbox"/> White	
	Inner Ring	<input checked="" type="checkbox"/> Black	
CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

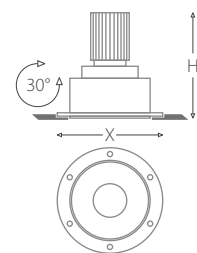

LUMIX B


LFSL1045B

TRIMLESS ADJUSTABLE SPOTLIGHT



	Wattage (W)	18W
LUMEN OUTPUT	N 4000K	1380
	W 3000K	1280
SYSTEM EFFICIENCY	No. of LEDs	2
	THD (%)	-
	Power Factor	0.8
	Driver Rating	9-15V DC 700mA x 2
	Surge	1.7kV
DIMENSIONS (in mm)	Diameter X	159
	Height H	111
	Cutout Ø	125


SYSTEM SPECS	Housing	Aluminum	
	LED Make	Bridgelux	
	Driver Brand	LAFIT	
	Dimming	Triac / Analog / Dali	
BEAM ANGLES	9W		
	18°		
COLOUR OPTIONS	Housing	<input type="checkbox"/> White	
	Inner Ring	<input checked="" type="checkbox"/> Black	
CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz



LUMIX C

LFSL1045C

TRIMLESS ADJUSTABLE SPOTLIGHT

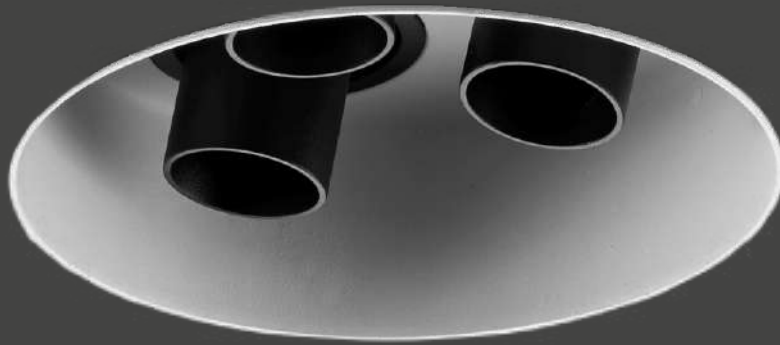

Wattage (W)		27W
LUMEN OUTPUT	N 4000K	2070
	W 3000K	1920
SYSTEM EFFICIENCY	No. of LEDs	3
	THD (%)	60
	Power Factor	0.8
	Driver Rating	9-15V DC 700mA x 3
	Surge	1.7KV
DIMENSIONS (in mm)	Diameter X	169
	Height H	111
	Cutout Ø	135

SYSTEM SPECS	Housing	Aluminum
	LED Make	Bridgelux
	Driver Brand	LAFIT
	Dimming	Triac / Analog / Dali



COLOUR OPTIONS	Housing	White
	Inner Ring	Black

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

